




Sony SRS-X5 Button Pad Replacement

When the buttons stop working, this guide will help in replacing the button pad.

Written By: Jeffrey Yalung

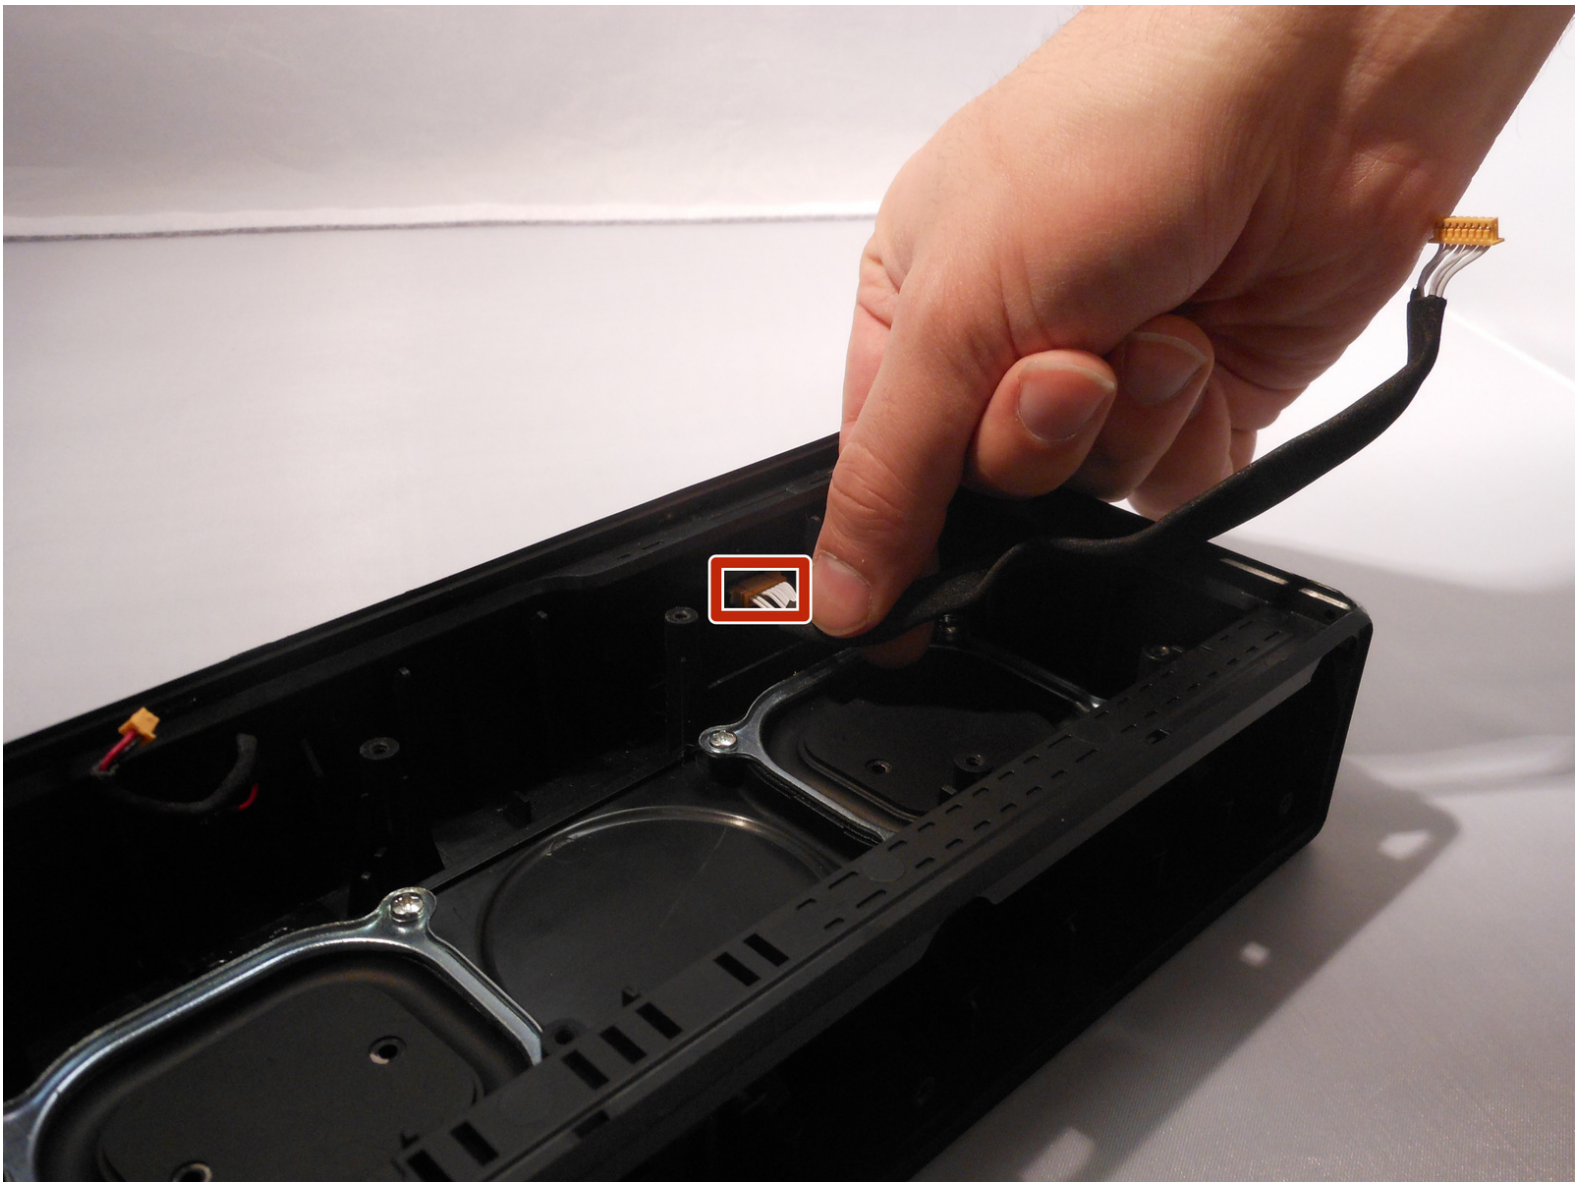


INTRODUCTION

This guide will demonstrate how to remove the sticky button pad.

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [Metal Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-


Step 1 — Battery

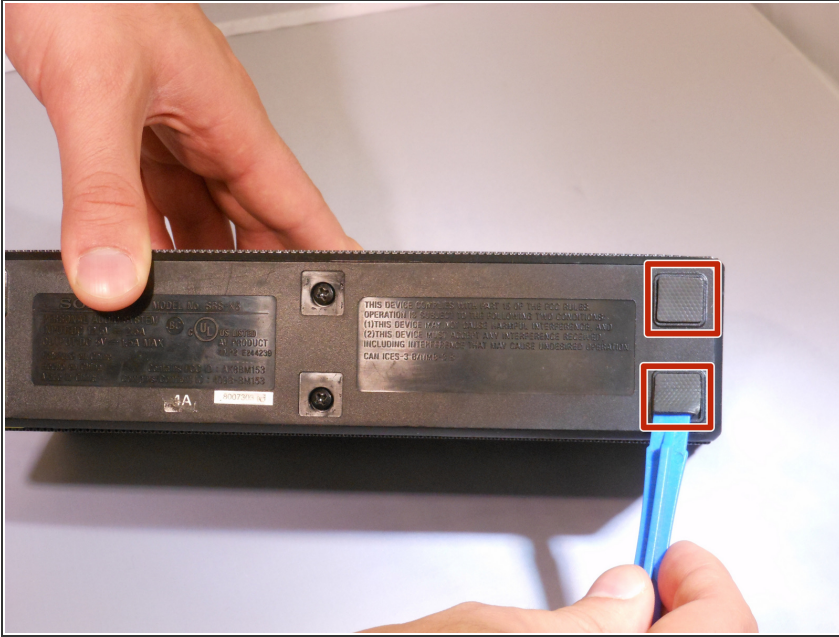

- Remove the pads on the bottom of the speaker using the blue plastic opening tool to reveal the screws underneath.


⚠ Make sure the speaker is unplugged and powered down before doing any work on the device.

Step 2

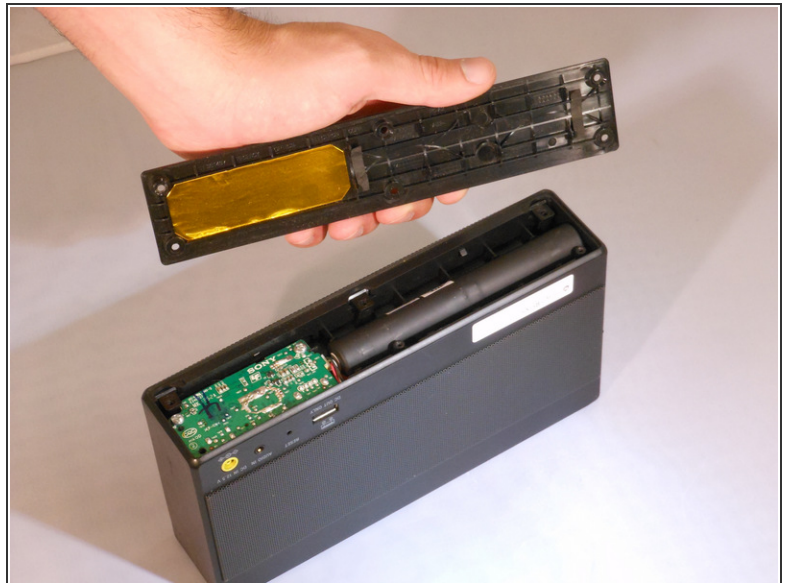

- Unscrew the six 6mm screws with a Phillips head #1 screwdriver.
- Remove the bottom panel of the speaker.

Step 3

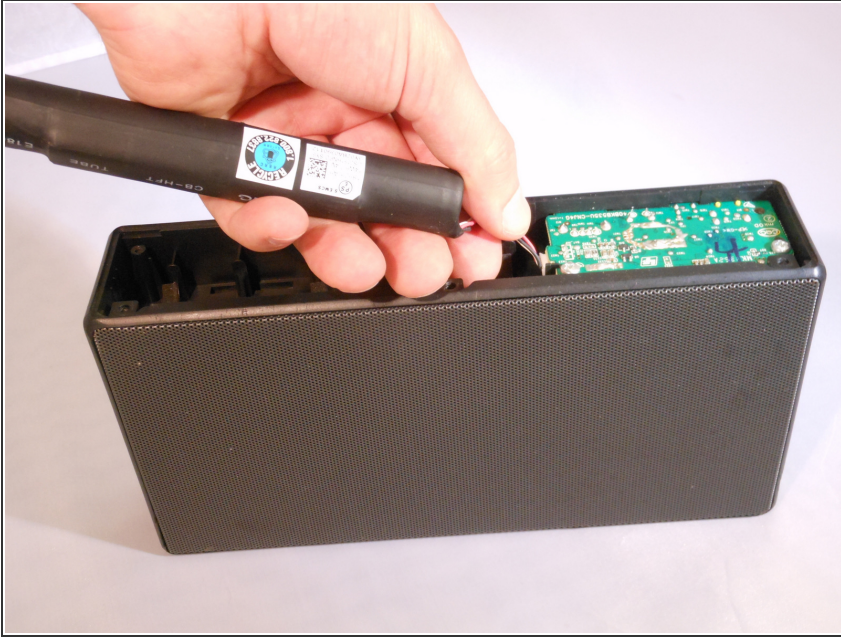


- Unplug the battery by gently pinching the plastic end connected to the smaller board and pull away.
- Remove the battery.

Step 4 — Speaker




- Remove the lower frame by pushing the middle plastic tab upward.

Step 5

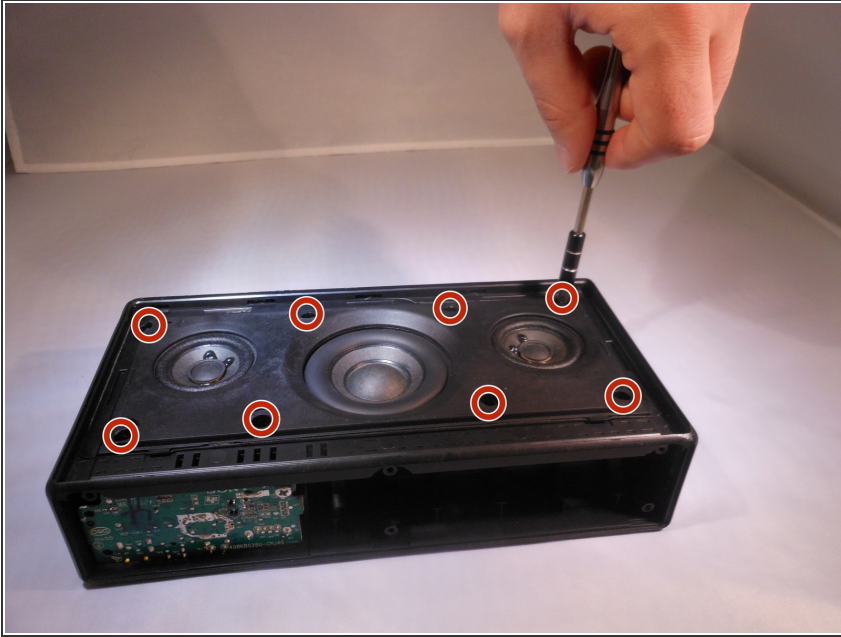


- Remove the eight 0.5mm Phillips #1 screws from the speaker panel.

Step 6

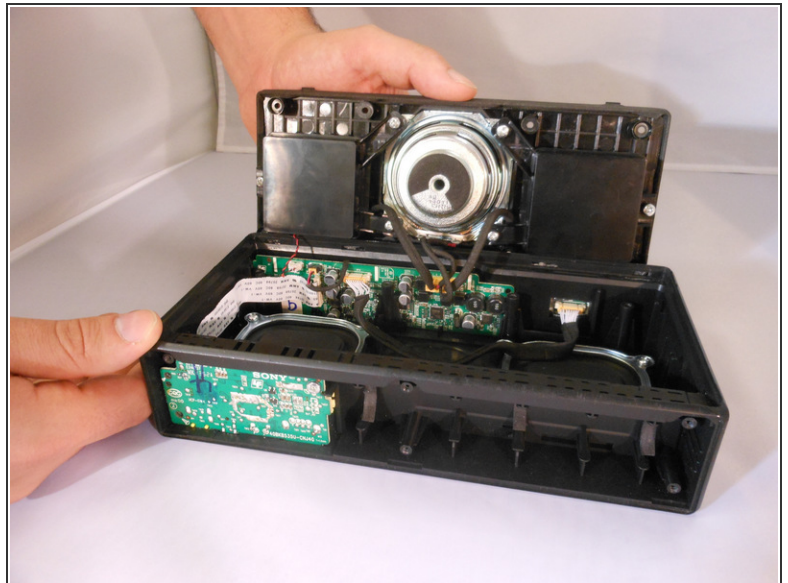


- Using the plastic opening tool, flip open the speaker panel.

Step 7

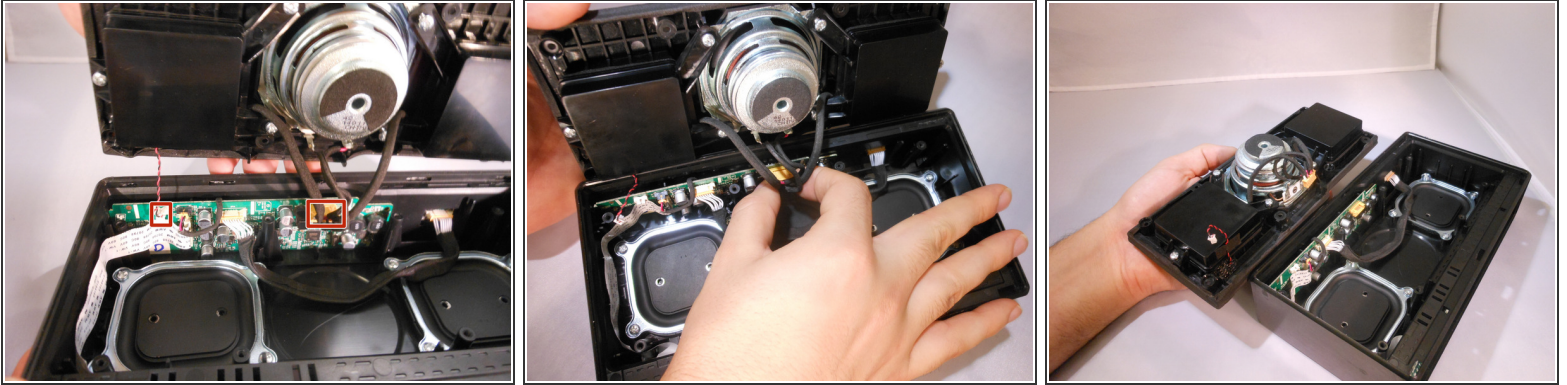



- Unplug the two cables connecting the speaker to the motherboard by squeezing the sides of the plastic ends.

Step 8 — Button Pad

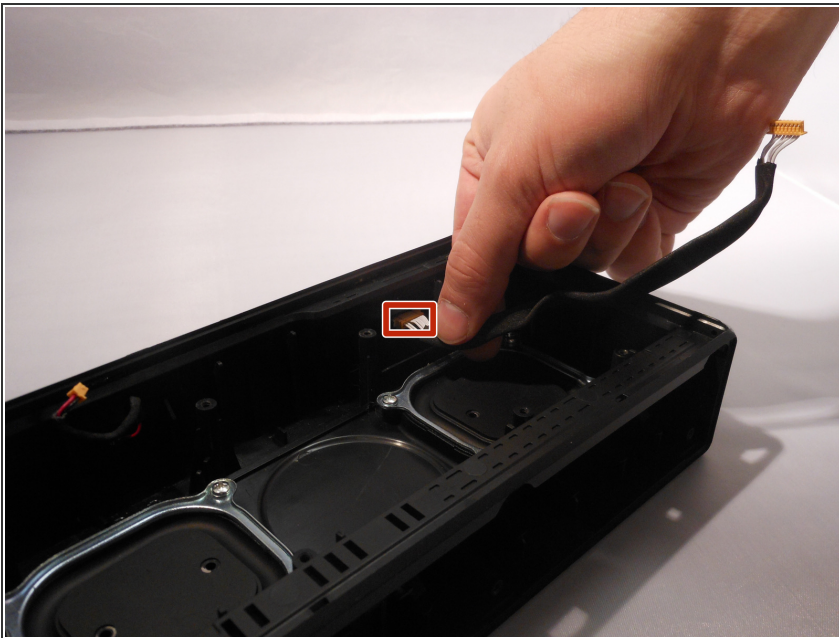

- Unplug the electrical cord from the button pad.

Step 9

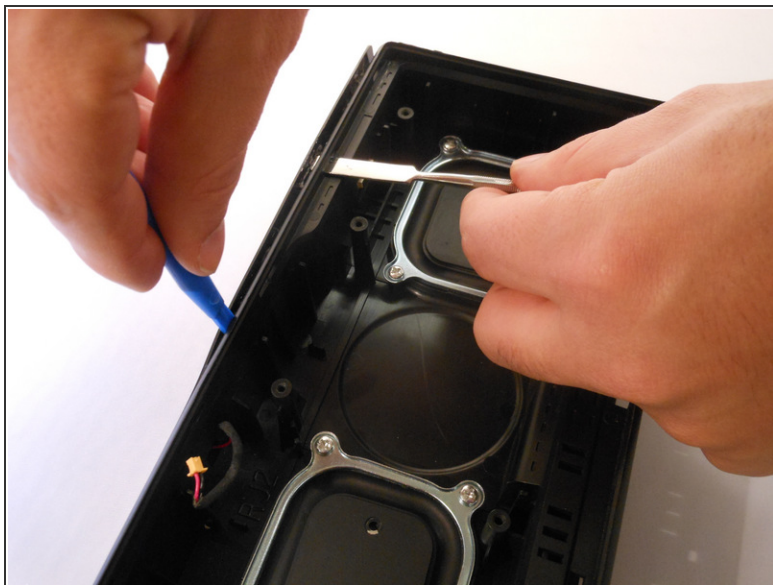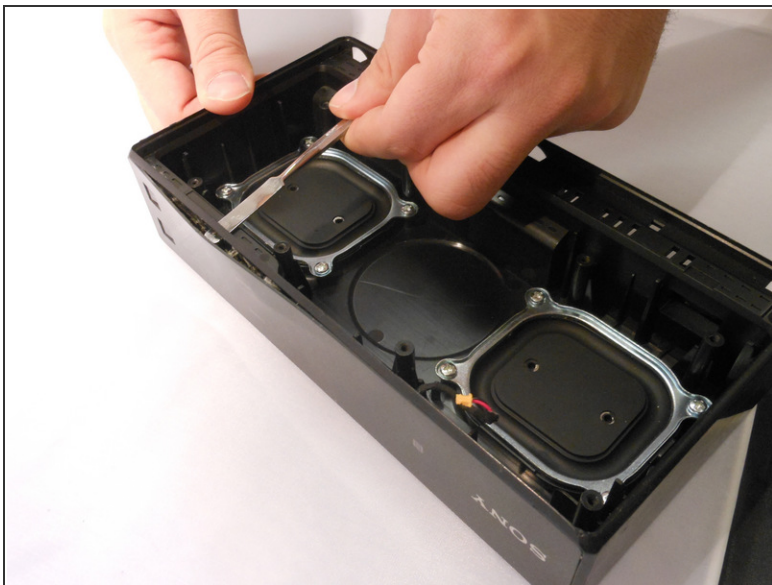


- Using both the plastic opening tool and metal spudger gently pry open the cover from the top of the speaker.

Step 10




- Gently remove the cover using your hands.
- ⓘ Make sure you remove the cover gently so it doesn't break.

Step 11

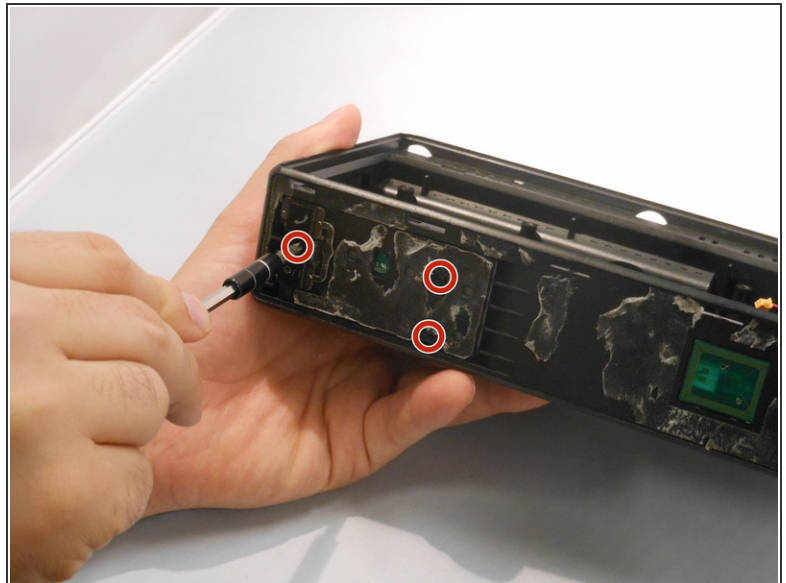

- Using the Phillips #00, unscrew the three 3.32mm screws keeping the button board in place.

Step 12

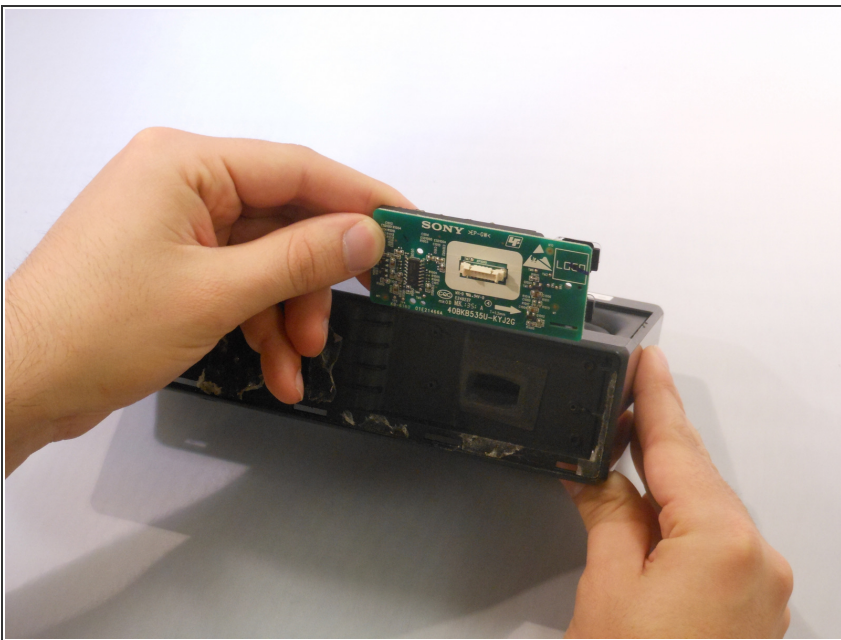

- Gently remove the button pad from the speaker.

To reassemble your device, follow these instructions in reverse order.

